

BA-88A

Semi-Auto Chemistry Analyzer

- Endpoint , Fixed-time , Kinetics and Absorbance
- Wavelengths range 340 to 670nm
- 7.0 " TFT touch screen & popup keypad
- External keyboard and mouse support via USB
- Up to 200 tests can be programmed
- Testing modes: flowcell and cuvette
- User-friendly interface
- Power-failure protection
- Universal power supply



mindray

healthcare within reach


BA-88A

Semi-Auto Chemistry Analyzer

Straightforward software interface, easy to get started!

Large LCD touch-screen, clear and user-friendly


Two USB ports (2.0), for keyboard, mouse, printer

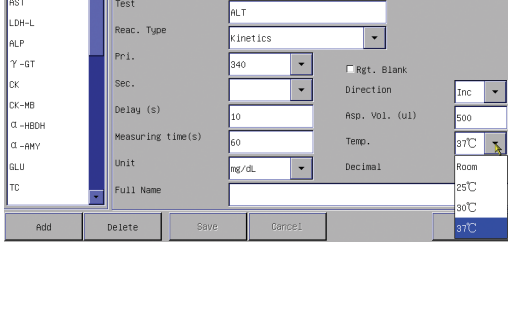


- Simple parameters setup
- Quick interchange between 4 temperature options
- Support Bi-Chromatic tests



- Multi-functional and comprehensive testing panel interface display
- Real-time monitor of reaction curve/data and temperature change
- Parameters can be reviewed in test panel

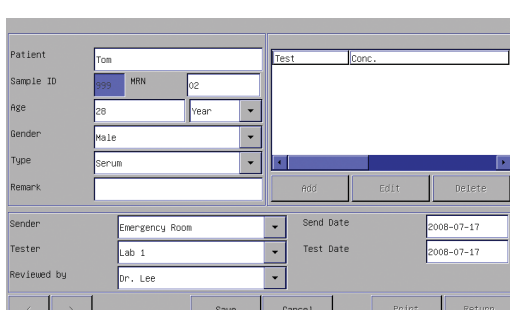

- Customizable patient information
- Capable of adding off-system test results

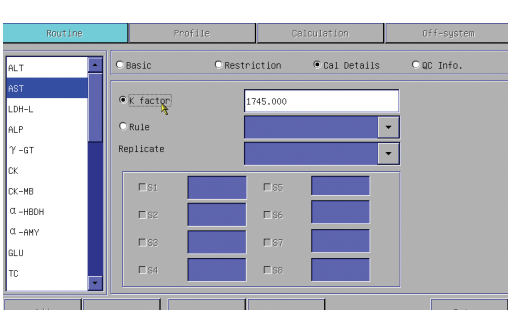

- Support K-factor programming

Support two testing modes: Flowcell or Cuvette; easy to shift between modes

Easy maintenance: remove black cover to change lamp



BA-88A

Semi-Auto Chemistry Analyzer

Technical Specifications:

Principles

ALT, AST, ALP, ACP, GGT, α -HBDH, LDH, CK, AMY, TG, TC, HDL-C, UA, UREA, Cr, Glu, TP, Alb, T-bil, D-Bil, TBA, NH₄⁺, HCO₃⁻, Ca, Mg, Cl⁻, Na, K, apoA1, apoB, Lp (a), C3, C4, IgG, IgA, IgM, HbA1c, Alcohol, Amphetamines, Barbiturates, Benzodiazepine etc.

Analysis Method

Endpoint , with or without reagent blank
Kinetics , with or without reagent blank
Two-point Kinetics/Fixed-time , with or without reagent blank
Absorbance
Turbidimetry
Linear and non-linear calibration

Light Source Tungsten-halogen
lamp 6V/10W

Wavelength Range

Automatic by 8-position filter wheel
6 standard filters : 340nm , 405nm , 450nm , 510nm , 546nm , 578nm
2 filters optional: 630nm and 670nm . Bandwidth < 8nm
Stray light : < 0.1 % @ 340nm

Photometric Range

0~3.5 ABS
Stability : < 0.005A / 20min @ 340nm

Flowcell

Stainless steel with quartz window
Measuring volume : 32 μ L
Optical path : 10mm
Aspiration volume programmable : 200~9000 μ L

Input

Touch screen with touch pen and popup keypad
Mouse or Keyboard via USB

Temperature Control

By means of Peltier elements
Room temperature , 25 $^{\circ}$ C , 30 $^{\circ}$ C and 37 $^{\circ}$ C

Storage

More than 3000 sample results
More than 1000 QC results

Printer

Built-in thermal printer
Support HP series

Interface

RS232 serial port supporting data transmission
USB port (2.0) for keyboard , mouse , printer

Operating Environment

Temperature : 15 $^{\circ}$ C~30 $^{\circ}$ C
Humidity : 35%~85% , no condensation

Power Requirement

Wide power supply : AC 100-240V, 50 / 60Hz

Dimension

430mm x 360mm x 170mm (L x W x H)

Weight

6.8 Kg

DISTRIBUTOR:



MINDRAY is a trademark of Shenzhen Mindray Bio-Medical Electronics Co., Ltd. Specifications subject to changes without prior notice.
© 2010 Shenzhen Mindray Bio-Medical Electronics Co., Ltd. All rights reserved.
P/N:ENG-BA88A-210285v4-20100203

mindray

Mindray is listed on the NYSE under the symbol "MR"
Mindray Building, Keji 12th Road South, High-tech Industrial Park,
Nanshan, Shenzhen 518057, P.R. China

Tel: +86 755 26582888 Fax: +86 755 26582680

E-mail: intl-market@mindray.com Website: www.mindray.com